



Consommation  
et Corporations Canada

Consumer and  
Corporate Affairs Canada

Bureau des brevets

Patent Office

Ottawa, Canada  
K1A 0C9

(11)	(C)	1,277,400
(21)		533,657
(22)		1987/04/02
(45)		1990/12/04
(52)		343-69
C.L. CR.		325-10
		343-3

(51) INTL.CL.<sup>5</sup> G01S-5/14; G08B-25/00; B60R-25/10

(19) (CA) **CANADIAN PATENT** (12)

(54) Anti-Theft and Locating System

(72) Rapoport, Uri , U.S.A.

(73) Advanced Strategies, Inc. , U.S.A.

(30) (US) U.S.A. 849,827 1986/04/09

(57) 33 Claims

Canada

1277400

-1-

ANTI-THEFT AND LOCATING SYSTEM

DESCRIPTION

This invention relates to security devices, particularly to a device used to identify the position or location of a movable object, such as an automobile, appliance, painting, or even a child.

Major crime problems in the United States include the theft of valuable movable objects, such as automobiles and the like, and missing children. In general when taken, these objects do not leave a trail by which the object can be traced or tracked. Furthermore, the objects must be visually identified, which means that they may be hidden or their appearance altered to prevent retrieval.

In the past various protection systems have been provided to protect automobiles and other such items from theft. These systems have, in general, initiated an alarm, such as a siren or flashing light, to alert persons nearby of an unauthorized entry or movement of the item. Notwithstanding such alarm-type security systems, thefts and unauthorized takings have continued.

Other systems have been disclosed in which an electromagnetic signal, such as a radio signal, is sent from a vehicle which has been broken into to a special group of antennae located throughout an area, which then transmits the signal to a police station. Based on the proximity of the vehicle to an antenna, an approximation of the vehicle's position is made. However, such a system requires a special group of antennae to receive the signal and does not provide accurate information as to the specific location of the vehicle.

In other systems, the position of a vehicle is to be determined by use of a gyroscope and an odometer. See, for example, U.S. Patents No. 4,024,493 and 4,139,889. However, gyroscopes may drift so that direc-



5 tional accuracy may vary. Furthermore, reliance on the  
odometer may not be reliable since the wheels to which  
the odometer is connected can slip or the vehicle may be  
moved by towing without changing the odometer. Thus,  
transmitted information as to the vehicle's location may  
be inaccurate.

10 U.S. Patents No. 3,644,883 and 3,718,899, disclose a  
system for tracking a vehicle, such as a bus, as it moves  
along a predetermined route. There, signpost receivers  
are provided along the route to receive signals from the  
bus and then relay those signals to a central station for  
determination of the bus's location. This again requires  
that individual signal-receiving signposts be mounted  
along a predetermined route.

15 Navigational satellite systems, sometimes  
referred to as global positioning systems (GPS systems),  
are used by the military to identify the position of land  
bases, ships, airplanes, vehicles, etc. For example, an  
airplane may receive a signal from a satellite system and  
then convert that signal into position identifying  
information.

25 The use of navigational satellites to identify  
the position of an automobile is disclosed in U.S. Patents  
No. 4,445,118 and 4,459,667. In 4,445,118, it is  
disclosed that a patrol car can determine its position  
using the United States Government's Navstar satellite  
system. Similarly in 4,459,667, a guidance system for an  
automotive vehicle is disclosed, which includes a dead  
reckoning system and the use of a navigational satellite  
30 system. However, this system only identifies the loca-  
tion of the vehicle to the vehicle occupants. Neither  
system disclosed in said patents provides a security  
system for use in locating and retrieving stolen vehicles

or other items.

It is an object of this invention to provide a security system for signalling the unauthorized entry or taking of an object, such as a vehicle, and signalling the location of the object to a central or base station.

It is another object of this invention to utilize existing signal-carrying networks for communication between the vehicle, for example, and the central station.

10 It is yet another object of this invention to utilize the existing navigational satellite systems to determine the location of the vehicle.

Another object of this invention is to provide a security system which will issue a position-locating  
15 signal upon an unauthorized entry, use or taking of the vehicle or other item and as the vehicle moves.

These and other objects of this invention will become apparent from the following description and appended claims.

20 There is provided by this invention a system for precisely identifying the position of an object such as, but not limited to, a vehicle and advising a central station of such position. More specifically, a vehicle, for example, can include a receiver for receiving position  
25 signals from a navigational satellite and converting those signals into information as to the location of the vehicle.

A transmitter will then transmit the location information, via existing systems, such as the cellular  
30 telephone system to a central station for processing. Thus special signal detecting receivers, signposts, or the like, are not required and all components of the system may be standard off-the-shelf items.

Furthermore, the signal may be transmitted when  
35 there is an unauthorized entry or movement of the vehicle, which transmission can be initiated by various

1277400

-4-

sensors that detect breakage, entry, etc. In addition, the owner of a vehicle can initiate transmission to update the system as to location, etc.

5       Displays can be provided within the vehicle for displaying the position of the vehicle on a map.

10       Moreover, communication links with the vehicle can be provided for the occupant to communicate various information to the central station or vice versa. For example, the central station could activate, within the vehicle, various alarms (silent or audible) or even vehicle disabling devices.

15       Thus broadly the invention contemplates a method of determining the unauthorized movement of and location of a randomly positioned object in which coded navigational signals are transmitted to the object which comprises the steps of receiving and converting the coded navigation signals into a coded object location signal, establishing an approved coded object location signal, testing the object coded location signal to determine movement of the object in comparison to the approved coded object location signal, establishing a signal connection between the object and a central station in response to unauthorized relocation of the object, transmitting the object location signal to the central station, and decoding the coded object location signal to determine the location of the object.

20       The invention also includes an apparatus for locating a vehicle which comprises a plurality of detectors on the vehicle with each monitoring for a different unauthorized access condition, a navigation receiver in the vehicle for receiving and converting a plurality of navigation codes into a vehicle position code, a signal transmission means for the vehicle which may be  
25       activated to automatically call a central station, a storage means for storing a vehicle identity code, and control means connected to the detectors, to the navigation receiver, to the signal transmission means and to the storage means which is operable in  
30       response to operation of one or more of the detectors to generate an unauthorized access code and to communicate with the navigation receiver and the signal transmission means and to generate and  
35       provide to the signal transmission means a coded signal including

1277400

-4a-

the vehicle identity code, the vehicle position code and the unauthorized access code for transmission to the central station.

The invention also provides for an object-locating system which comprises a mobile telephone base station, an object  
5 including first receiver means for receiving satellite transmitted signals including location signals defining object location, an access transmitter operable to transmit an authorized access code to the object, a transmitter means at the object, a central  
10 station for receiving messages, access means at the object operable to produce a signal with the transmitter means at the object including message forming means operable to form a message including the location of the object from the location signals, and a control means at the object for receiving the access code and the location signals and responsive to the location signal and  
15 the lack of the access code to activate the transmitter means to transmit the message to the central station over the mobile telephone base station, and with the message including the position of the object.

In another embodiment the inventive apparatus comprises a  
20 plurality of detectors on the vehicle with each of the detectors monitoring for a respective unauthorized access to the vehicle and being able to cause generation of a respective first code in response to an unauthorized access and/or vehicle movement, a navigation receiver in the vehicle for receiving navigation codes  
25 from a plurality of orbiting satellites and converting the navigation codes to a vehicle location second code, a signal transmission means in the vehicle which may be activated to automatically call a central station via a transmission link, and a microcomputer comprising a microprocessor, memory means storing  
30 an operating program and for storing data for processing, a bus means connecting the memory means and the microprocessor, and an interface means connecting the bus means to the navigation receiver, to the transmission means and to the plurality of detectors, with the microcomputer being programmed to activate the  
35 navigation receiver and the signal transmission means and generate the respective unauthorized access and/or movement code in response to operation of one of the detectors and to provide a

1277400

-4b-

coded signal including the first and second codes to the signal transmission means for transmission to the central station.

Other objects, features and advantages of the invention, its organization, construction and operation will be best understood from the following detailed description, taken in  
5 conjunction with the accompanying drawings, on which:

FIGURE 1 is a schematic representation of an object locating system constructed in accordance with the present invention;

10 FIGURE 2 is a perspective view of certain of the elements of Fig. 1 as they may appear in a physical form;

FIGURE 3 is a perspective view of a keypad which may be employed in practicing the present invention;

15 FIGURE 4 is a side view of a vehicle having a vehicle code door lock, as an alternative to and similar to the keypad of Fig. 3;

FIGURES 5a, 5b and 5c is a flow chart of system operation to output data from a vehicle in accordance with the present invention;

20 FIGURE 6 is a flow chart of the operation of the system with respect from dispatch to the vehicle point of view;

FIGURE 7 is a flow chart for a first menu of Fig. 6;

FIGURE 8 is a flow chart for a second menu of



Fig. 6;

FIGURE 9 is a flow chart for the receive mode of operation; and

FIGURE 10 is a flow chart for interrogation, by way of Navstar codes, for example, for finding vehicle location, appearing with Figure 8.

ON THE DRAWINGS

Referring to Figs. 1 and 2, the anti-theft and locating system of the present invention is generally illustrated as comprising a vehicle 12, which is linked to a global positioning system 14, a cellular telephone system 16 and an authorization transmitter, hereinafter a personal transmitter, 18. As shown, the global positioning system may comprise a plurality of satellites 20, 22, 24, which provide timing and position data as provided, for example, by the Navstar system.

The cellular telephone system includes a plurality of cells, such as the cells 26, 28, each having transmitting and receiving equipment 30 connected to a mobile switching office 32. The mobile switching office, as is well known, is tied to a telephone exchange 34, which may establish connections between the mobile switching office 32 and a central security office, hereinafter a dispatch office, 36. The system techniques and details of operation of cellular systems are well known in the art and will not be discussed further herein, with exception of reference to function in the operation of the system between the vehicle 12 and the dispatch office 36.

The vehicle 12 is shown as comprising all of the elements necessary for the anti-theft and position locating features of the invention. The vehicle 12 is therefore seen as comprising, or more specifically having thereon or attached thereto, a plurality of antennae 38, 40, 42 and 44, which are respectively connected to a GPS receiver 46, a cellular mobile telephone transceiver 48,



and a disarm receiver 50. As shown, the disarm receiver 50 disarms the vehicle portion of the system upon proper operation of the personal transmitter 18 which senses a user code to the disarm receiver by way of an antenna

5 52. As an alternative, the disarm receiver and the personal transmitter could operate on the basis of the well-known infrared techniques, such as employed in remote control of television sets, video cassette recorders and the like.

10 The apparatus in the vehicle is also seen as comprising a central processing unit (CPU) 54, a read only memory (ROM) 56, a random access memory (RAM) 58, a peripheral interface adapter (PIA) 60, a further peripheral interface adapter 62, and a modulator-demodulator  
15 (MODEM) 64, all interconnected by way of a data bus 66. The PIA 62 is also provided with logic outputs 68 and logic inputs 70 for the purposes set forth below.

The system is also provided with a power supply 72, including the vehicle power supply, and a back-up  
20 power supply for supplying all of the components.

Fig. 2 illustrates one possibility of how the apparatus may be physically set up and interconnected. In addition, Fig. 2 illustrates a wired keypad 18' as the  
25 personal transmitter, which is connected by way of the logic inputs 70 to the PIA 62 to bypass or deactivate, as desired, the disarm receiver 50.

Also shown in Fig. 2 is an ignition disable line 76 and an ignition status line 78.

In Fig. 3, the keypad 18 (18') is separately  
30 illustrated as a device for transmitting digital data to the PIA 62, either indirectly (via the disarm receiver 50) or directly (via the logic inputs 70).

In Fig. 4 a portion of the vehicle 12 is illustrated as comprising a door 80 having a coded door lock  
35 which may be unlocked by way of a keypad 18'', which transmits an unlock signal to the PIA 62 for, in turn,

1277400

-7-

release of the lock.

As discussed above, all of the elements in or at the vehicle may be installed in a single package, which is perhaps located in the trunk of the vehicle with  
5 the antennae mounted at a suitable location or locations.

A conventional Navstar receiver provides ranging information from at least four GPS satellites (only three shown) and their ephemeris data to the microprocessor to compute vehicle position. Alternately, some  
10 Navstar receivers contain an internal microprocessor to compute vehicle position and provide data output in the form of a standard RS232 output to the data bus by way of the PIA 60.

In either case, the microprocessor (CPU 54)  
15 would be employed to ascertain vehicle status and alert a central dispatch station 36 of the vehicle condition and location through the duplex cellular mobile telephone link utilizing the MODEM 64. The microprocessor may be of conventional design, as set forth below, and comprise  
20 the CPU 54; the ROM 56, which stores the program instructions for carrying out programs of the type set forth below; the RAM 58, which stores intermediate results; and the MODEM 64, which is employed to couple data to and from the bus 66 and the cellular mobile telephone  
25 transceiver 48. In addition, it includes the PIA's 60, 62, respectively, for receiving data from the Navstar receiver 46 and auxiliary vehicle sensing and control.

In order to reduce power consumption, it is preferable that the CPU 54 be of complementary metal-oxide-semiconductor (CMOS) construction. If, as mentioned above, the Navstar receiver 46 includes its own microprocessor, the CPU 54 could be an 8 or 16 bit  
30 processor; however, if all computations are to be performed by the CPU 54, a 16 or 32 bit processor would be  
35 required, such as the newer CMOS version of the 68000, since the Navstar calculations require about 100K of 16

1277400

-8-

bit memory.

The auxiliary logic inputs and outputs are employed to expand the microprocessor's active role in protecting the vehicle. These inputs/outputs 70, 68 can  
5 also be optically coupled or otherwise clamped to further isolate the microprocessor against electrical transients which may be unintentionally, or even intentionally, induced. One of the inputs, the input 78 of Fig. 2, provides the ignition status to automatically lock-in the  
10 vehicle's present position data when the ignition is switched off. This activates the microprocessor watch-dog function and any unauthorized movement of the vehicle would alert the microprocessor 54 to call the central dispatch office 36 by way of the cellular mobile  
15 telephone data link. When activated, the microprocessor 54 would identify itself to the central dispatch office, furnish its location, the nature of distress, and periodically up-date its position based upon distance traveled and rate of travel.

20 Authorized movement of the vehicle is permitted by unlocking the microprocessor watch-dog function by pressing a button on the personal transmitter 18, which stores the user authorization code, and which transmits a  
25 digital code word to the disarm receiver 50, much in the same manner as a remote control garage opener. In the alternative, the watch-dog function would be unlocked by entering the user authorization code from an auxiliary keypad 18, 18'. The inputs 70 can also be connected to provide standard anti-vandalism functions to form a fully  
30 integrated vehicle protection system. For example, the inputs may be connected to motion/shock detectors to sense the forcing of locks, window breakage or the forcing open of the hood or trunk. They can comprise an audio window breakage detector, an internal ultrasonic  
35 motion detector or the like. In addition, an input can be connected to a standard vehicle battery current

1277400

-9-

detector to alert the microprocessor of a door or trunk opening when an interior accessory light is activated. Other inputs can sense movement (i.e., change of position) of the vehicle. Each input would occupy a separable logic input of the PIA 62 and thus have a unique address to alert the microprocessor of the nature of disturbance and permit the proper alert to be issued to the central dispatch office.

Auxiliary digital outputs from the microprocessor are available to actively protect the vehicle and signal its condition or status (armed/unarmed) to the owner. One output, for example, may be made available to disable the vehicle starter. Another output will be available to disable the vehicle ignition system (lead 76 of Fig. 2) or, through similar outputs, to stop the vehicle by turning off the fuel supply, disabling the microprocessor-controlled carburetor of vehicle so equipped, or by applying the brake on microprocessor-assisted anti-skid braking systems.

An output may also be used, for example, in conjunction with the personal transmitter to flash the parking lights of the vehicle to acknowledge the microprocessor watch-dog function has received the proper access code and acknowledge disablement.

These combinations of functions form the active protection of the vehicle in which the microprocessor initiates a call to the central dispatch office with the nature of this disturbance and the assistance required by security personnel. In a similar manner, some of the digital inputs can be activated by the driver to request road assistance from the central dispatch office as may occur with respect to flat tires, engine trouble and the like, or the request may concern navigational assistance. In the latter case, verbal communications could be established with the central dispatch office by way of the cellular mobile telephone link. The mobile telephone

1277400

-10-

therefore may not require a handset, although one may be provided.

An alternate mode of operation can be initiated over the duplex cellular mobile telephone system from the central dispatch office since each microprocessor 54 will be issued a unit serial number. Unlike the user programmable unlock entry code which is entered by the personal transmitter and which can be changed by the owner, the unit serial number is installed and resides only in the ROM 56. As a result, the central dispatch office can initiate a response from the microprocessor 54 by issuing the proper serial number over the cellular link. The microprocessor can then respond with the vehicle location in the case where the vehicle is stolen when the anti-theft function was disarmed or otherwise bypassed. This also provides the protection for the vehicle even if the user authorization access code were to be observed and entered by an unauthorized person.

Another response of the microprocessor is to initiate a self-diagnosis routine and respond to system check operation periodically and automatically. In addition, the microprocessor may be employed to aid in recovery of a stolen vehicle by activating the proper auxiliary output to stop the vehicle, as mentioned above, with respect to ignition, fuel, carburetion, brakes or the like, for example when the vehicle is being pursued by the police.

The above description embodies the basic concept and sets forth the structure for carrying out the invention of an active anti-theft device. It should therefore be noted that some protection be included to protect the main antennae. Preferably these antennae and the disarm receiver are designed as a single multi-band antenna. Since the Navstar signal is high (1575 MHz) and the cellular telephone network is also high (800-900 MHz), the antennae will be small, and it is therefore

possible to install two antennae for redundancy. It is also possible to monitor the antennae impedance or their nearby stray capacitance to detect changes and automatically alert the central dispatch office of present location. Since the MODEM 64 establishes the data rate, and present data rates of 1200 bits/second are common, data transfer will occur in a fraction of a second once a clear channel is secured. Alternately, several antennae may be phased together using stripline techniques to construct a flat distributed antenna array and, for example, in a fiberglass rooftop or trunk lid, making destruction of the entire array highly unlikely.

It should also be noted that while the foregoing description has been geared to the Navstar system and the cellular mobile telephone system, alternate systems are also applicable. For example, the Navstar signals may be augmented to reduce or aid in computational power as proposed in the aforementioned U.S. 4,445,118, another involves the improved mobile cellular systems which are fully digital.

Turning to Figs. 5A, B and C, a flow chart of operation with respect to the vehicle is illustrated, which is basically self-explanatory. The upper portion (Fig. 5A) relates to the use of the ignition to activate the system. The following portion of the flow chart relates to the Navstar start-up time from the request for Navstar position to the storing of the position in the RAM 58. The next following portion of the flow chart (5B) relates to a detection of movement through repetitive transmission of the identification of the CPU 54 and the then present position of the vehicle. Each of the check loops (5C) also indicates the arm of individual anti-theft elements. Although only four check loops have been illustrated, many others could, of course, be employed, with the final result being a renewed position request to be calculated from the Navstar position information. An additional

loop or loops may be provided to check if the system has been turned on or off. For example, one may dial into the system from home, for instance see the image from the dispatcher's terminal on his own terminal, for example, a map showing the vehicle's location.

As further examples, reference is taken to Figs. 6-10. In Fig. 6, the first check concerns activation of the anti-theft system and is essentially an on/off menu, to wit:

#### MENU

- |    |  |        |
|----|--|--------|
| 10 | 1. Send signal to turn on or off the system in the vehicle | On/Off |
|    | 2. Request vehicle location                                | RCL    |
|    | 3. Send disabling signal, i.e., ignition                   | DS     |
| 15 | 4. Send Navstar signal in the area                         | NSA    |

The flow chart for the above menu is illustrated in Fig. 7 in which the input is the vehicle identification code and the authorization code. If the vehicle and authorization codes are improper, an option is a display or a signal indicating a wrong code. If proper, however, the right-hand side of Fig. 7 applies.

Fig. 8 illustrates a flow chart for a menu concerning the transmission of Navstar position signals and relates to the second route in Fig. 6. Here again, if the password is wrong, a display or indication is provided to loop back to the input. If the codes are correct, however, the vehicle identification is dialed, an on signal is transmitted, a Navstar signal is transmitted in the area, the RCL code for requesting vehicle location is transmitted and the system then switches to the receive mode.

The receive mode is illustrated in the flow chart of Fig. 9. Here, the input is from the vehicle and concerns the vehicle identification, the position and the



1277400

-13-

nature of the disturbance. If the vehicle identification and location codes correspond, the position thereof in Cartesian coordinates is provided to the mobile telephone system and activates a map program by way of which the authorities may be informed of vehicle location. On the other hand, the mapping program provides for a display of the vehicle identification from a location and nature of disturbance so that the authorities or service personnel may be notified.

If in the receive mode the identifications are not the same, the input may be sent a new emergency call and the vehicle identification may be stored for processing. This may include a search for the owner identification. This information is then questioned to determine if there is a diagnostic error, and if so, the vehicle identification is displayed. If not, the vehicle owner may be called for a notification and the position of the vehicle may be determined as mentioned above for activation of the mapping program.

Fig. 10 is a flow chart for receiving requested Navstar codes. Here, the vehicle identification and the Navstar code requests are input in order to retrieve the Navstar codes which are transmitted to the vehicle.

Apparatus for carrying out the invention may be a new fully integrated structure or, as mentioned above, may be an integration of well-known off-the-shelf components. Components of which may serve the purpose for constructing the apparatus and practicing the present invention are set forth in the following schedule.

SCHEDULE OF COMPONENTS

Reference	DESIGNATION AND MANUFACTURER
18',50	Digital Key Switch, Radio Shack 49-535
46	Navcore I <sup>TM</sup> , Collins Industrial GPS Products, Rockwell International, Cedar Rapids, Iowa
48	Mobile Telephone, Radio Shack 17-1002

- 54 CMOS STD Bus 80C85A CPU Card, 78C15, Pro-  
Log Corp., 2411 Garden Road, Monterey,  
California
- 56,58 CMOS STD Bus, 64 kByte RAM/EPROM Card  
5 77C08, Pro-Log Corp.
- 60 CMOS STD Bus, Dual Uart Card 73C04, Pro-Log  
Corp.
- 62 CMOS STD Bus Input/Output Port Card  
76C04, Pro-Log Corp.
- 10 64 STD-138-300/1200 Baud Modem Card, Micro  
Link, 14602 North U.S. Highway 31, Carmel, .  
Indiana
- 74 STD Bus Card Rack, 8 Cards, BR08T, Pro-  
Log Corp.

15 The software for implementing the system and  
the conversion of the codes to local map coordinates,  
including city street address and the like may be pro-  
vided by Hunter Systems Company, Inc., 5775 E. Los  
Angeles Avenue, Suite 103, Simi Valley, California. The  
20 data processing using this software is preferably done at  
the dispatch station, although it can be done at the  
vehicle if so desired.

Although I have described my invention by  
reference to particular illustrative embodiments and  
25 modes of operation thereof, many changes and modifica-  
tions of the invention may become apparent to those  
skilled in the art without departing from the spirit and  
scope of the invention. While the system has been described in  
conjunction with a vehicle, several aspects of the invention  
30 have utility with respect to theft or unauthorized relocation  
of any object implemented with the system, such as a valuable  
art object or the like. I therefore intend to include within  
the patent warranted hereon all such changes and modifications  
as may reasonably and properly be included within the scope of  
35 my contribution to the art.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A method of determining the unauthorized movement of and location of a randomly positioned object in which coded navigational signals are transmitted to the object comprising the steps of:
  - receiving and converting the coded navigation signals into a coded object location signal;
  - establishing an approved coded object location signal;
  - testing the object coded location signal to determine movement of the object in comparison to the approved coded object location signal;
  - establishing a signal connection between the object and a central station in response to unauthorized relocation of the object;
  - transmitting the object location signal to the central station; and
  - decoding the coded object location signal to determine the location of the object.
2. The method of Claim 1, wherein the object is a vehicle.
3. The method of Claim 2, and further including the step of activating a device on the vehicle in response to a coded signal from the central station to the vehicle.
4. Apparatus for locating a vehicle and for activating a device in the vehicle upon unauthorized access to and/or unauthorized movement of the vehicle, comprising:
  - a navigation receiver in the vehicle for receiving and converting a plurality of navigation codes into a vehicle position code;
  - means for establishing an approved vehicle position code;

1277400

-16-

means for cyclically testing the vehicle position code against the approved vehicle position code;

signal transmission and receiving means in the vehicle which may be activated to automatically call a central station when the vehicle position code is different than the approved vehicle position code, and to receive a signal activated by the central system;

storage means for storing a vehicle identity code;

a device operable to perform one or more functions in the vehicle; and

control means connected to said signal transmission means and receiving means; to said storage means and to said navigation receiver to activate said signal transmission means in the event of unauthorized access and/or movement of the vehicle and to send a coded signal of the vehicle's position code and identity code to a central station, and upon receipt of a coded signal from the central station, to operate said device.

5. The apparatus set forth in Claim 4, wherein said device comprises:

disabling means effective to disable one or more operational systems of the vehicle to hinder further unauthorized movement of the vehicle.

6. A method of locating a vehicle which has a vehicle identity code stored therein, comprising the steps of:

monitoring at least one vehicle condition to detect unauthorized access to and/or movement of the vehicle;

operating a navigation receiver in response to detection of unauthorized access and/or movement to receive a navigation code from navigation code transmitters and converting the same to a position code prescribing the location of the vehicle;

1277400

-17-

combining the vehicle identity code and the vehicle condition;

generating a coded signal representing the type of unauthorized access and/or vehicle movement being performed;

combining the coded signal representing the type of unauthorized access and/or movement with the vehicle identity code and the vehicle position code;

generating a position code to form a coded signal for transmission;

activating a signal transmission means in the vehicle to automatically call and establish a communication link with a central station;

transmitting the coded signal to the central station over the signal transmission means and the communication link;

receiving the coded signal at the central station; and

decoding the coded signal to determine vehicle identity and the type of unauthorized access to the vehicle and/or the movement thereof and the location thereof.

7. The method of Claim 6, wherein said signal transmission means is a radio telephone instrument.

8. The method of Claim 6, wherein the step of monitoring is further defined as monitoring a plurality of different vehicles.

9. The method of Claim 6, wherein the steps of transmitting, receiving and decoding are cyclic to update vehicle location.

10. The method of Claim 6, and further comprising the steps of:

storing an authorized access code in the vehicle;

generating an access code to obtain access to the vehicle;

1277400

- 18 -

comparing the generated access code with the authorized access code; and  
preventing transmission from the navigation receiver when the two access codes agree.

11. Apparatus for locating a vehicle, comprising:

a plurality of detectors on the vehicle, each monitoring for a different unauthorized access condition;

a navigation receiver in the vehicle for receiving and converting a plurality of navigation codes into a vehicle position code;

a signal transmission means in the vehicle which may be activated to automatically call a central station;

storage means for storing a vehicle identity code; and

control means connected to said detectors, to said navigation receiver, to said signal transmission means and to said storage means, said control means being operable in response to operation of one or more of said detectors to generate an unauthorized access code and to communicate with said navigation receiver and said signal transmission means and to generate and provide to said signal transmission means a coded signal including the vehicle identity code, the vehicle position code and the unauthorized access code for transmission to the central station.

12. The apparatus of Claim 11, wherein the signal transmission means is a radio telephone instrument.

13. The apparatus of Claim 11, and further comprising decoding means at the central station for decoding the coded signal to determine vehicle identity, vehicle position and the type of unauthorized access.

1277400

-19-

14. The apparatus of Claim 11, wherein said control means comprises timing means for controlling repetitive transmission of the coded signal and updating means for updating the coded signal with respect to the vehicle position code.

15. The apparatus of Claim 11, wherein one of the detectors monitors door opening, and further comprising:

authorized access code means storing an authorized access code;

access code generating means operable to generate an access code; and

code comparison means connected to compare said generated and authorized access codes and connected to said control means to deactivate said control means and permit entry into the vehicle.

16. Apparatus for locating a vehicle, comprising:

a plurality of detectors on the vehicle, each of said detectors monitoring for a respective unauthorized access to the vehicle and able to cause generation of a respective first code in response to an unauthorized access and/or vehicle movement;

a navigation receiver in the vehicle for receiving navigation codes from a plurality of orbiting satellites and converting the navigation codes to a vehicle location second code;

a signal transmission means in the vehicle which may be activated to automatically call a central station via a transmission link; and

a microcomputer comprising a microprocessor, memory means storing an operating program and for storing data for processing, bus means connecting said memory means and said microprocessor, and interface means connecting said bus means to said navigation receiver; to said transmission means and to said plurality of detectors, said microcomputer programmed to activate said navigation receiver and said signal



1277400

-20-

transmission means and generate the respective unauthorized access and/or movement code in response to operation of one of said detectors and to provide a coded signal including said first and second codes to said signal transmission means for transmission to the central station.

17. The apparatus of Claim 16, wherein one of said detectors is a shock detector.

18. The apparatus of Claim 16, wherein one of said detectors is a window breakage detector.

19. The apparatus of Claim 16, wherein one of said detectors is an ultrasonic motion detector.

20. The apparatus of Claim 16, wherein one of said detectors is a battery current detector.

21. The apparatus of Claim 16, wherein one of said detectors is a movement detector for detecting a change in position of said vehicle.

22. The apparatus of Claim 16, and further comprising key means comprising a keypad for generating access codes, an access code storage section storing an authorized access code, and access code receiving means for receiving and comparing the stored and generated access codes, said access code receiving means connected to said microcomputer to signal the microcomputer to prevent activation of said navigation receiver and said signal transmission means in response to agreement of the two access codes.

23. The apparatus of Claim 22, wherein said keypad is mounted in a door of the vehicle and connected to said access code receiving means.

24. The apparatus of Claim 22, wherein said keypad comprises an electromagnetic transmitter and said access code receiving means comprises an electromagnetic receiver.

1277400

-21-

25. An object locating system comprising:  
a mobile telephone base station;  
an object including first receiver means for  
receiving satellite transmitted signals including  
location signals defining object location;  
an access transmitter operable to transmit an  
authorized access code to the object;  
transmitter means at said object;  
a central station for receiving messages;  
access means at the object operable to  
produce a signal;  
said transmitter means at said object  
including message forming means operable to form a  
message including the location of the object from the  
location signals; and

control means at said object for receiving  
the access code and the location signals and responsive  
to said location signal and the lack of the access code  
to activate said transmitter means to transmit the  
message to said central station over said mobile  
telephone base station, said message including the  
position of the object.

26. The object locating system of Claim 25,  
wherein said control means comprises:

a first memory for storing an operational  
program;

a second memory for storing position signals;  
and

a processor for forming messages in response  
to the program and the stored position signals.

27. The object locating system of Claim 25,  
wherein the object is a vehicle.

28. The method set forth in Claim 6, and  
further including the step of communicating a coded  
activation signal from the central station to the  
vehicle, the coded activation signal operating to  
activate one or more selected devices on the vehicle.

1277400

-22-

29. The method set forth in Claim 6 and further including the step of activating said navigation receiver in response to a signal caused by unauthorized access to the vehicle and/or received from said central station.

30. The apparatus set forth in Claim 11, and further including:

receiver means on said vehicle for receiving a second coded signal from said central station; and said control means is effective to activate said navigation receiver in response to receipt of said second coded signal from said central station and/or in response to operation of one or more of said detectors.

31. The apparatus set forth in Claim 30, and further including at least one device on said vehicle operable by said control means in response to receipt of said second coded signal.

32. The apparatus set forth in Claim 11, and further including receiver means on said vehicle for receiving a second coded signal from said central station, and at least one device on said vehicle operable by said control means in response to receipt of said second coded signal.

33. The apparatus set forth in Claim 31 or 32 wherein said device may comprise an audible alarm and/or a disabling mechanism.



1277400

10-1

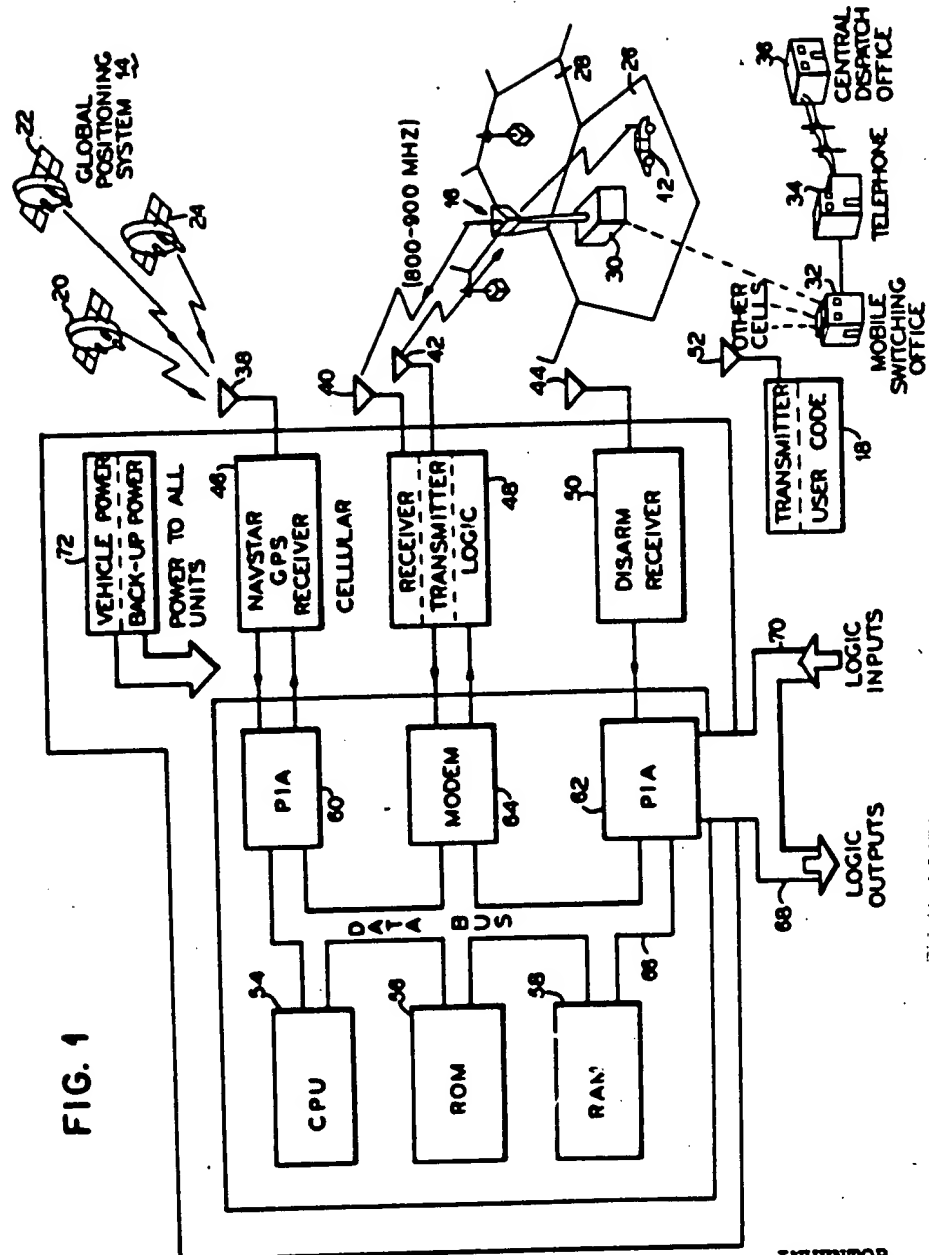


FIG. 1

INVENTOR  
URI RAPOPORT

*McIntire & Timmerman*

PATENT AGENTS

10-2

**FIG. 2**

The diagram illustrates a mobile station system. A central processing unit (CPU) is shown as a stack of components: a **ROM/RAM CARD** at the base, followed by a **CPU CARD**, a **MODEM CARD**, and a **UART CARD** at the top. The CPU is connected to several external devices via cables:

- A **NAVSTAR GPS RCVR.** (Navigation GPS Receiver) is connected to the UART CARD (80).
- A **CELLULAR MOBILE PHONE** is connected to the MODEM CARD (60).
- A **DIGITAL KEYPAD ALTERNATE TO SEE FIG. 3** is connected to the CPU CARD (54).
- The CPU is also connected to a set of **DETECTORS** via **REMAINING I/O SENSING LINES** (76, 78).

Internal components and connections are labeled with reference numerals: 56, 58, 64, 74, 80, 62, 40, 42, 46, 48, 14, 15, 18, 18', 76, 78.

M. ... ..

**PATENT AGENTS**

1277400

10-3

FIG. 3


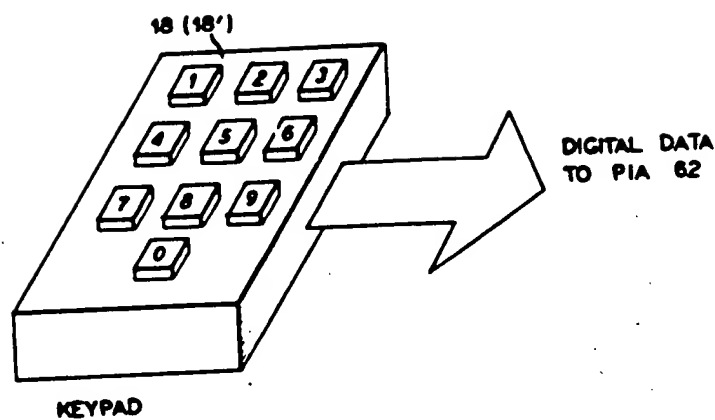


FIG. 4

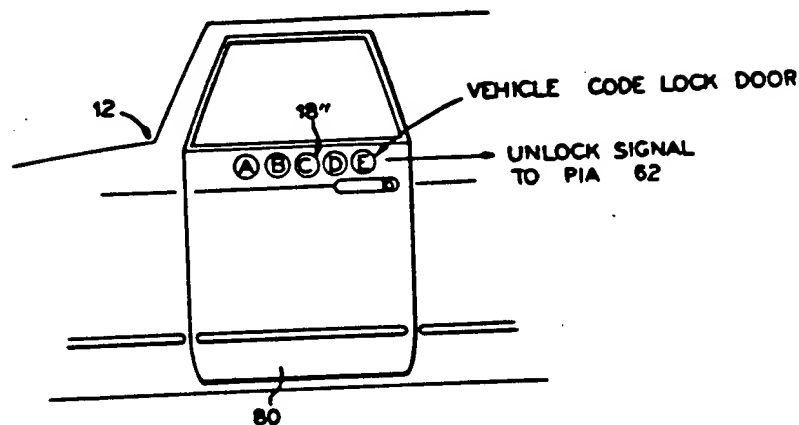

INVENTOR  
URI RAPOPORT


*Marshall & Finkelson*

PATENT AGENTS

1277400

10-4

FIG. 5A

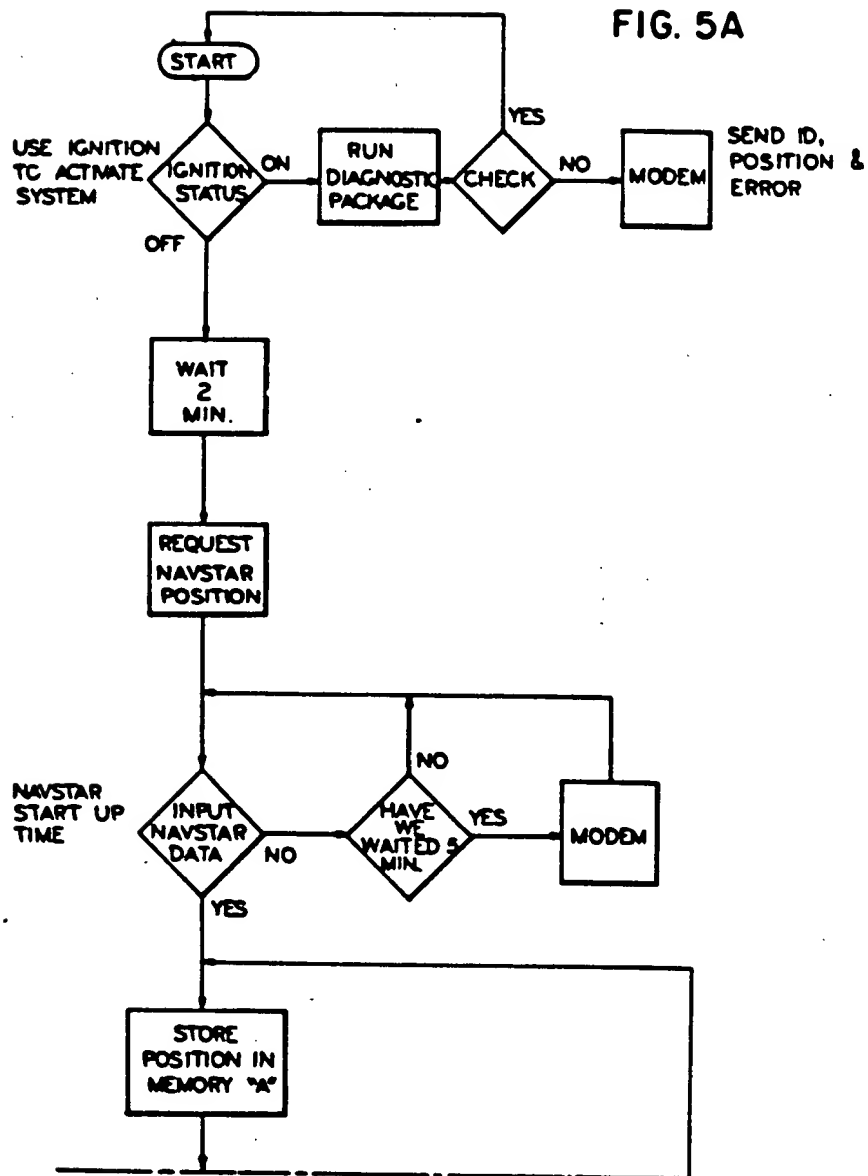

INVENTOR  
URI RAPOPORT


*Messing & Finlayson*  
PATENT AGENTS



1277400

10-5

FIG. 5B

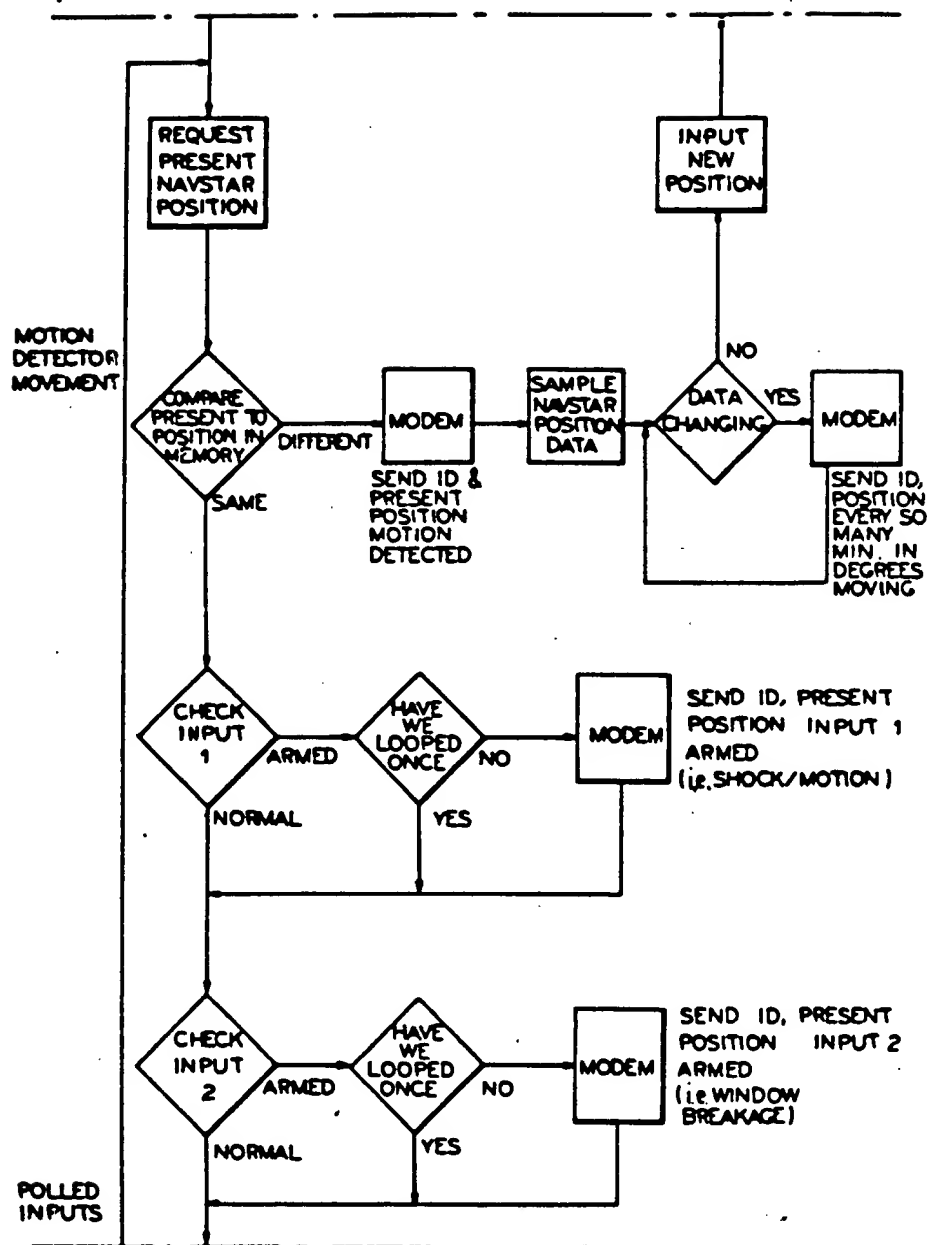

INVENTOR  
URI RAPOPORT


*M. J. & F. J. Finegan*

PATENT AGENTS

1277400

10-6

FIG. 5C

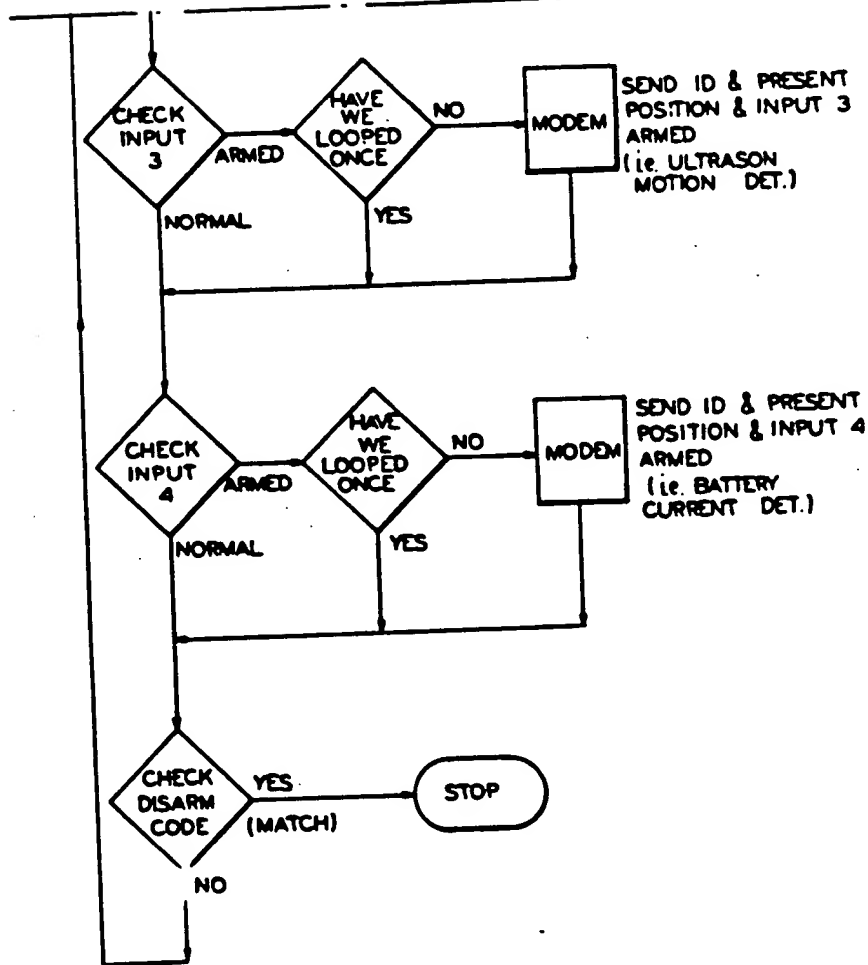

INVENTOR  
URI RAPOPORT


*M. J. & T. J.*

PATENT AGENTS

1277400

10-7

FIG. 6

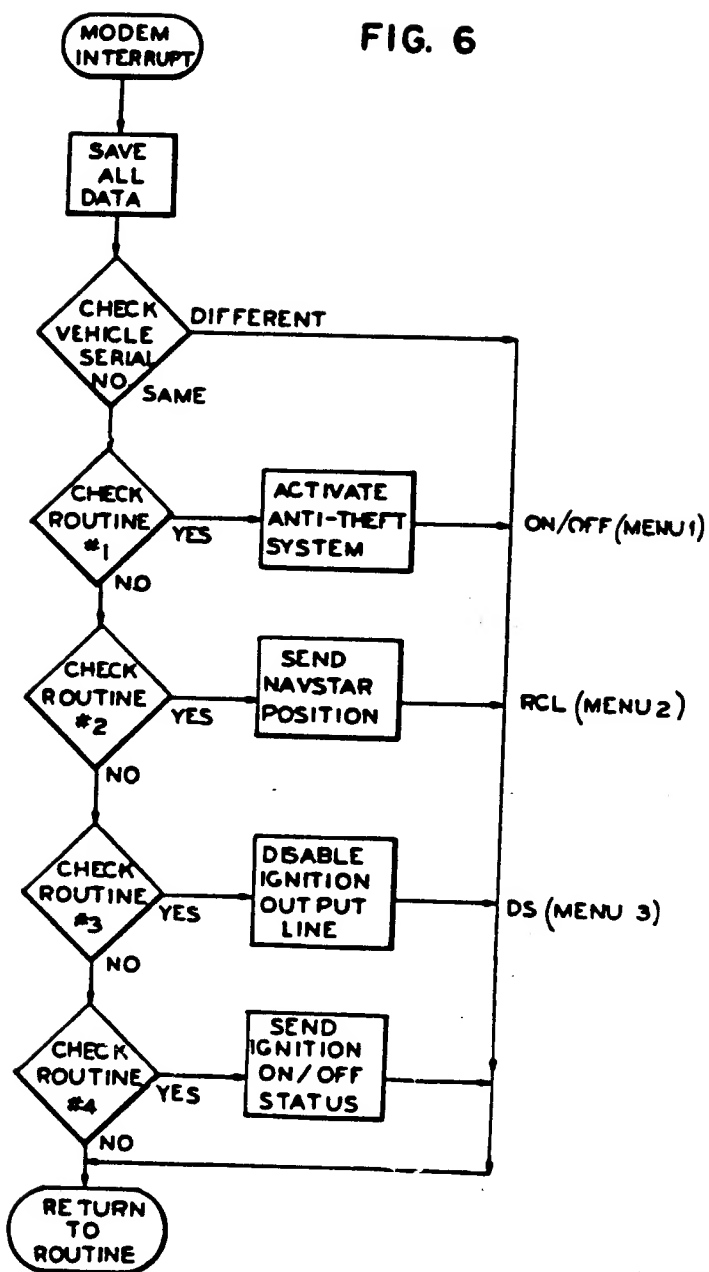


INVENTOR  
URI RAPOPORT

*Mr. Robert J. Finkelson*  
PATENT AGENTS

1277400

10-8

FIG. 7

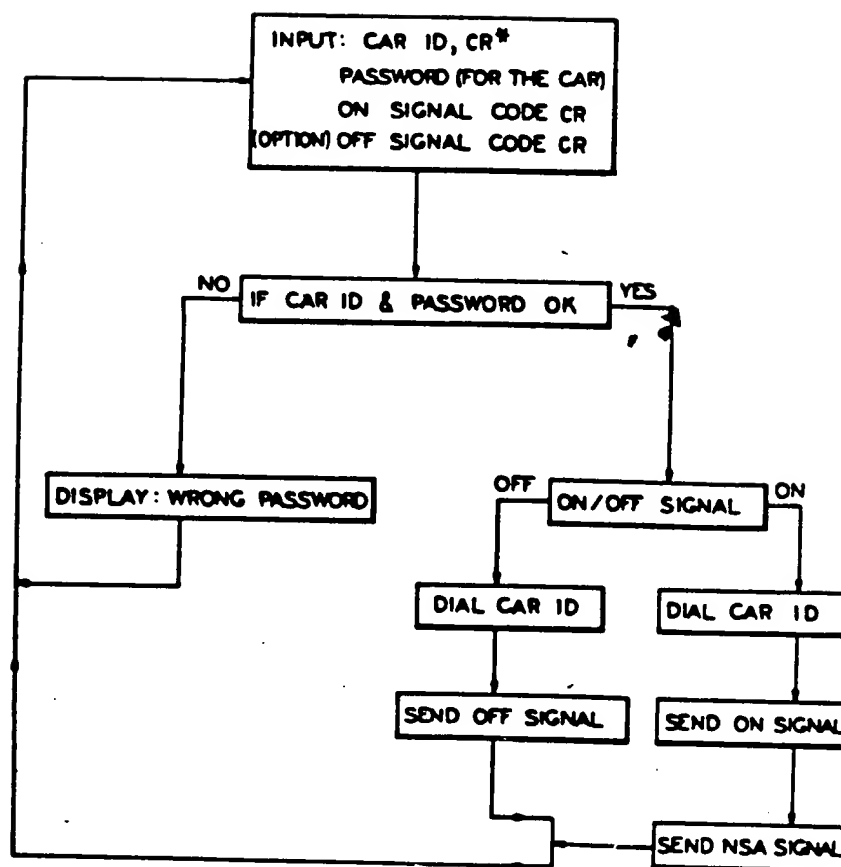

\*CR= CARRIAGE RETURN

INVENTOR  
URI RAPOPORT

*Mc... & ...*

PATENT AGENTS

1277400

10-9

FIG. 8


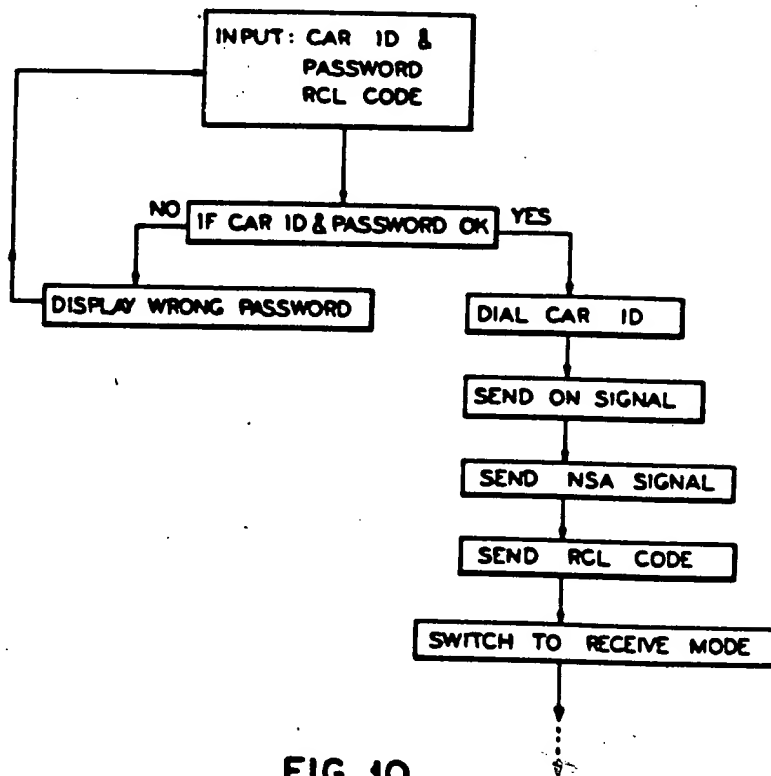


FIG. 10

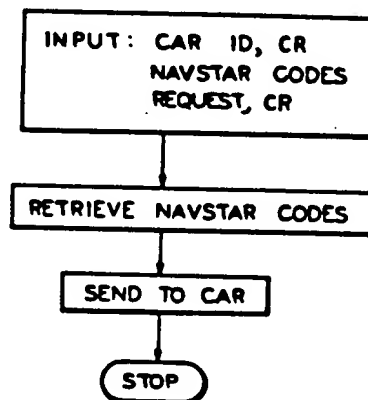

INVENTOR  
URI RAPOPORT


*McQuinn & Finlayson*

PATENT AGENTS

1277400

10 - 10

FIG. 9

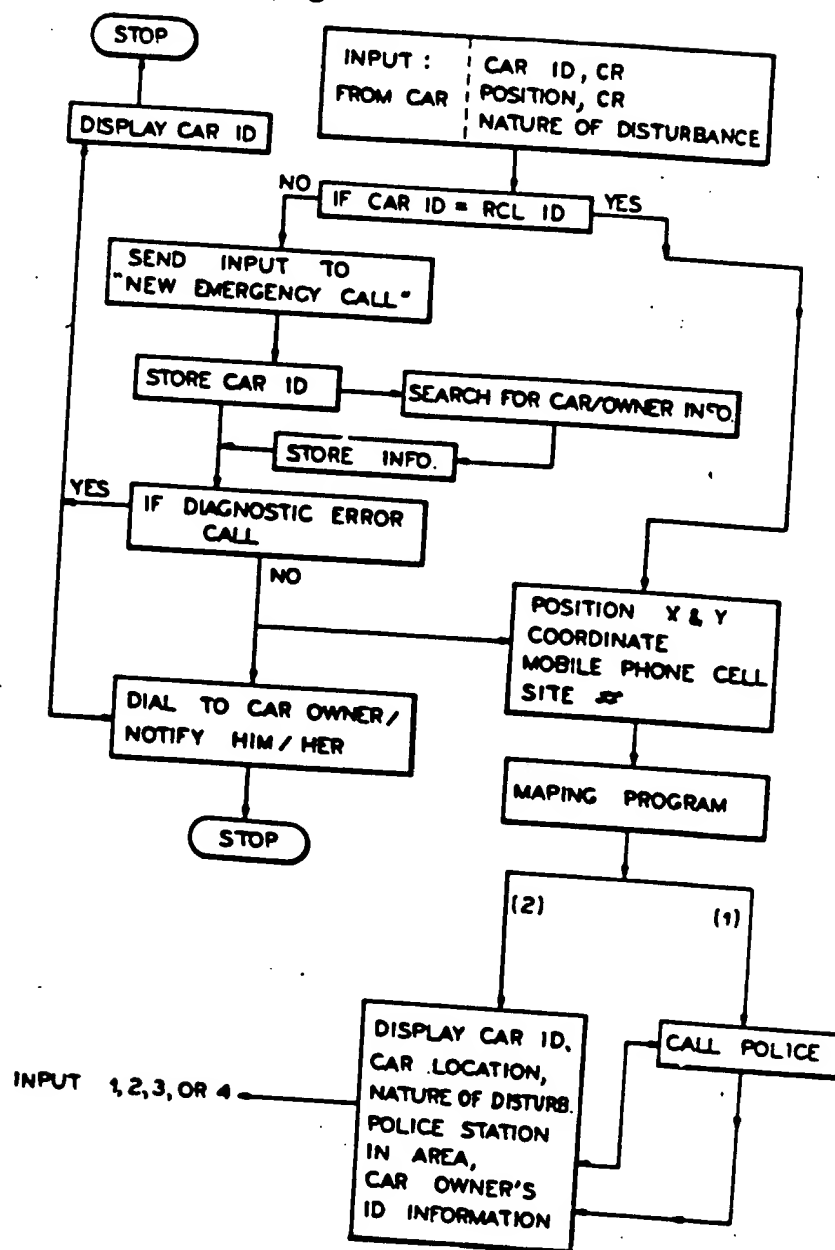INVENTOR  
URI RAPOPORT*McGraw-Hill & Finlayson*  
PATENT AGENTS